



No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
1			
2			

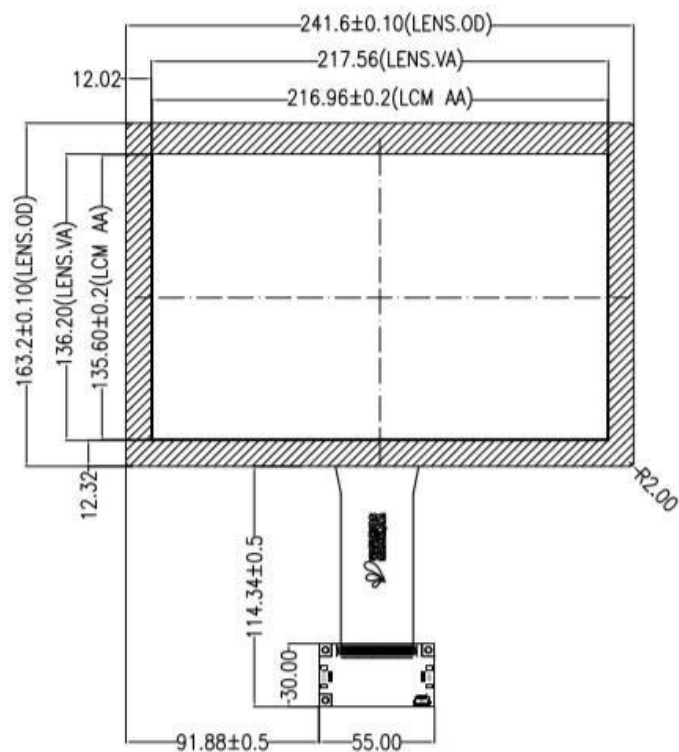


Screen printing area: Print Black

Front view

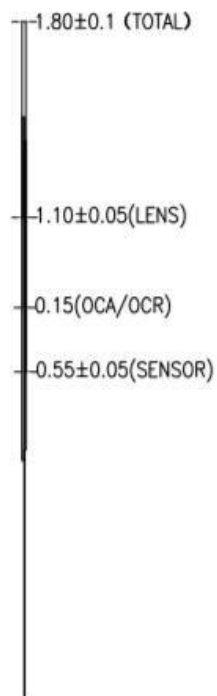

Side view

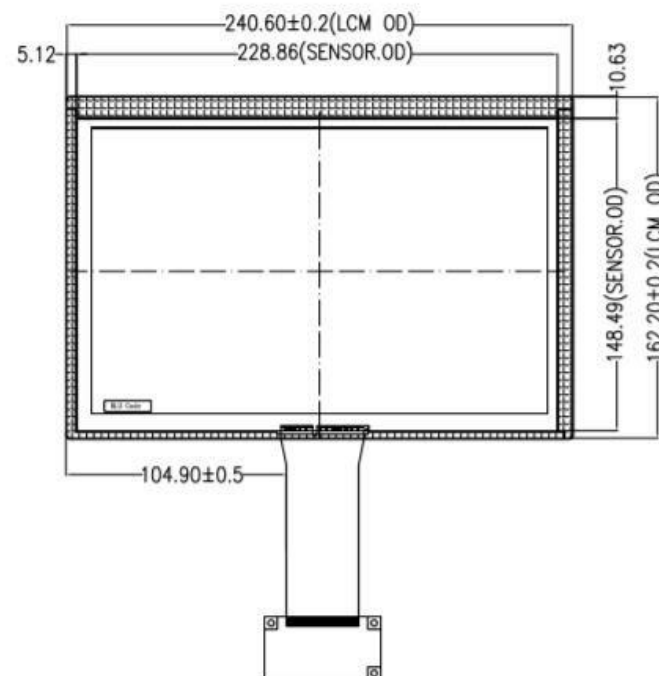


Double-sided Frame adhesive =0.175mm (3M9495)

Back view

USB Connector(J1)	
1	VCC(5V)
2	DN
3	DP
4	GND

Technical parameters			
1. Interfaces:	USB	8. Transmittance:	$\geq 85\%$
2. Structure :	G+G	9. Surface hardness:	$\geq 6H$
3. IC solutions:	ILI2311	10. Operate :	$-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$, $\leq 85\% \text{RH}$
4. Impact resistance:	16 (D012, Sec B11) / 132u/96uht=30u/11u	11. Storage :	$-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$, $\leq 85\% \text{RH}$
5. Touch points:	10 points	12. Brightness:	350cd/m ²
6. Power supply:	5V	13. Viewing angle:	85/85/85/85
7. Humidity range:	45 ~ 85%RH	14. Unmarked dimension tolerance as:	± 0.2



 杭州宏泉科技有限公司 GraHowlet Technology CO., Ltd							
Model	HX1011703			view direction		Unit	MM
Version	V1.0	Designer	LUO	Date	2017-4-11	Edition	A1
Customer		Approved	HBZ	Date	2017-4-11	Proportion	1:1